


TACTEX

INDUSTRIES

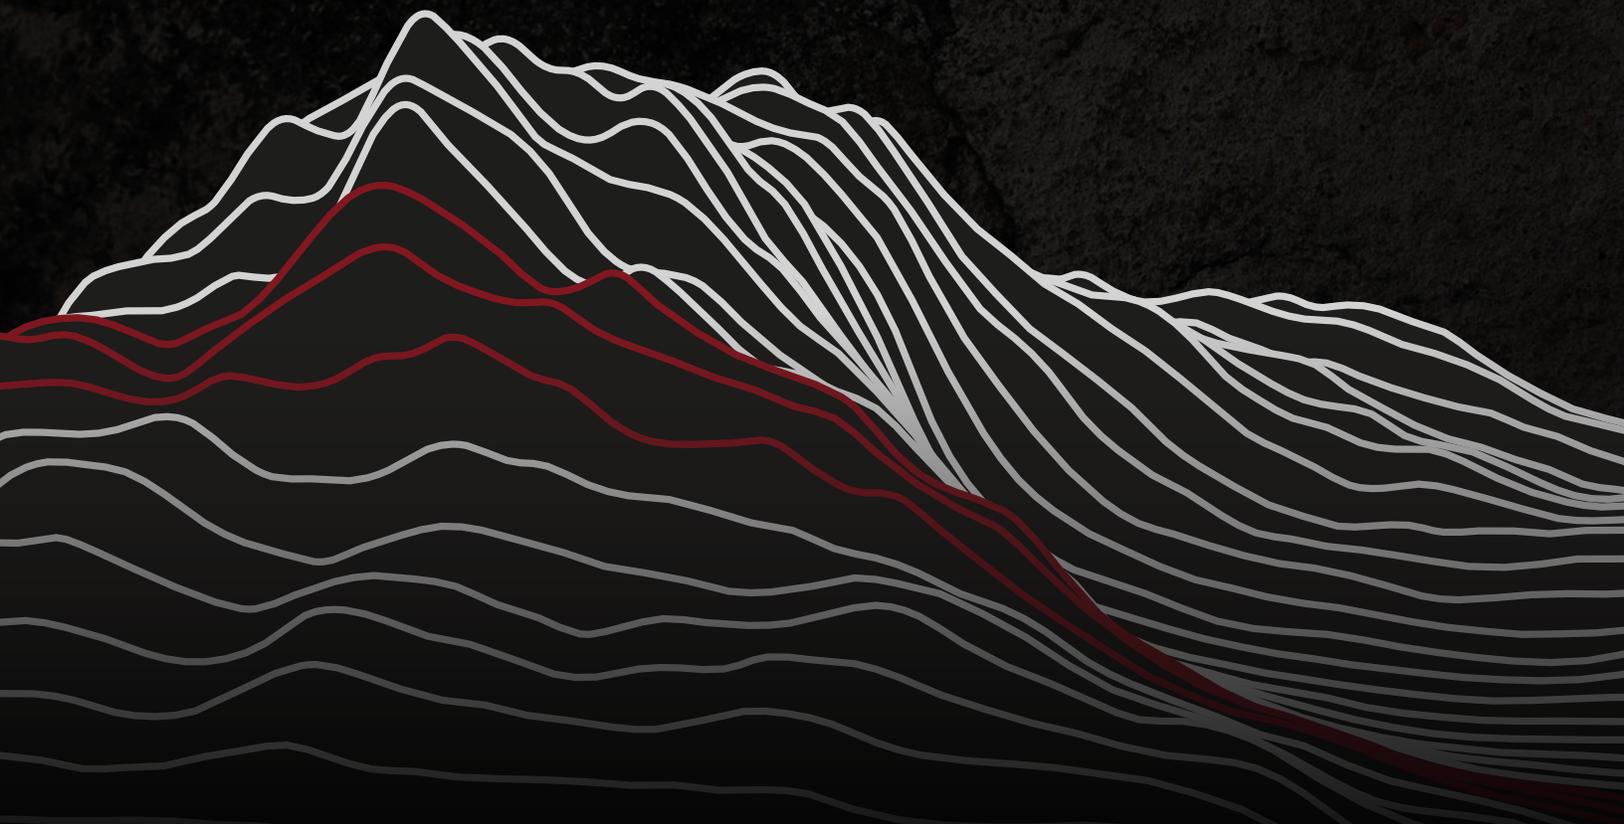

**EXPLORATION
DRILLING EQUIPMENT**

DESIGNED TO DELIVER



Cutting-edge, reliable and adaptable surface drills – for any terrain.

As Canada's most innovative diamond drilling equipment supplier, we deliver the most powerful and precise products to help you enhance any project. Our team combines decades of field, fabrication, and design experience to create a customizable drill that integrates into three platforms. Whether you're looking for a new rig or specific parts, our one-stop-shop helps you find the perfect fit, with some of the best service in the industry. All parts and equipment are built in-house, interchangeable, and offer advanced safety features. No matter how complex the job, our equipment is here to get the job done.

CONTACT US Call: 250-905-0628 Email: sales@tactexindustries.com

TACTEX

INDUSTRIES

One Drill / Three Platforms



11' (3.35m)
X-10 Long Stroke


6' (1.8m)
X-10



FX
Platform



SX
Platform

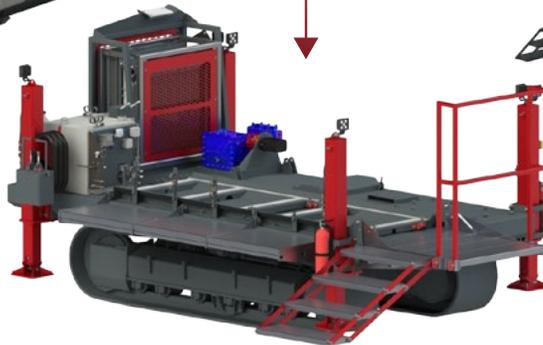

TX
Platform



X-10 DIAMOND DRILL

A robust, reliable, and highly versatile surface drill, created to perform and integrate seamlessly into fly, shack, and track platforms. Navigate diverse terrain exploration by adapting a single drill on each job.


KEY FEATURES:

- Air-cooled hydraulics system
- 24" mast dump
- Full guarding package
- Removable skids
- Tier 4 Cummins Turbo Diesel 180 Horsepower 4 cylinder
- Levelwind winch
- Available with three proprietary platform options

SPECIFICATIONS

ENGINE	Tier 4 Cummins Turbo Diesel 180 Horsepower 4-cylinder
HYDRAULIC SYSTEM	Air-cooled hydraulics system Hydraulic pilot controls Splitter box pump drive system Rexroth and Kawasaki triple pump design Synchronized head and foot clamp with options to isolate functions
FEED FRAME	UHMW slide saddle 24" mast dump Proprietary feed frame design internally reinforced 45,000 lbs pull back double ram 45 to 90 degree operational angle
WIRELINE ASSEMBLIES	Level wind winch 1,500m 3/16" wireline capacity Rotzler swivel rod hoist
HEAD & FOOT CLAMP	P or H heads available P foot clamp
GUARDING	Full guarding package available for all applications Interlock switch for safe drilling operation


FEATURES

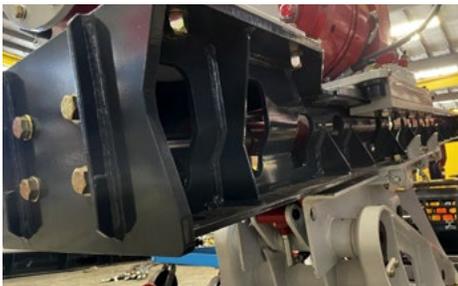

Engineered feed frame



24" mast dump sub frame

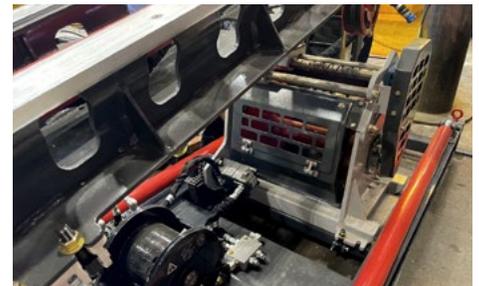

Levelwind winch



Aluminum components






Pump drive



Engine options

OPTIONS

- X-Spec P Head W. Funk Trans and P Rod Clamp "Christensen"
- AVD P Head W. Funk Trans & P Rod Clamp "Boyles"
- Mirow B-20 "H" Head with P Rod Clamp "Boyles"
- Level Wind Winch with Guards
- Rod Hoist Winch

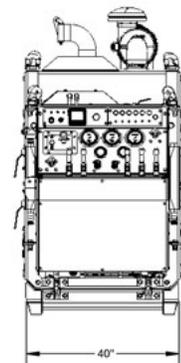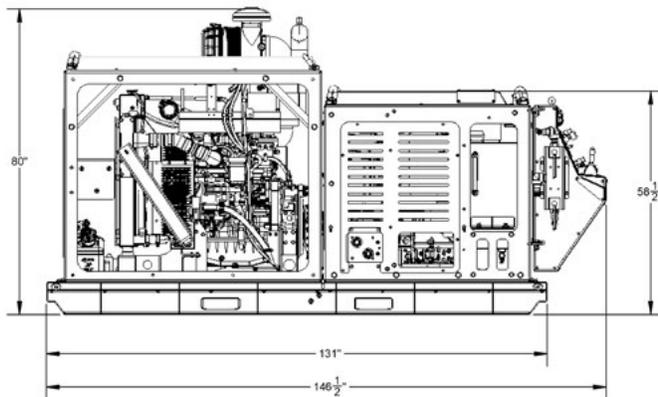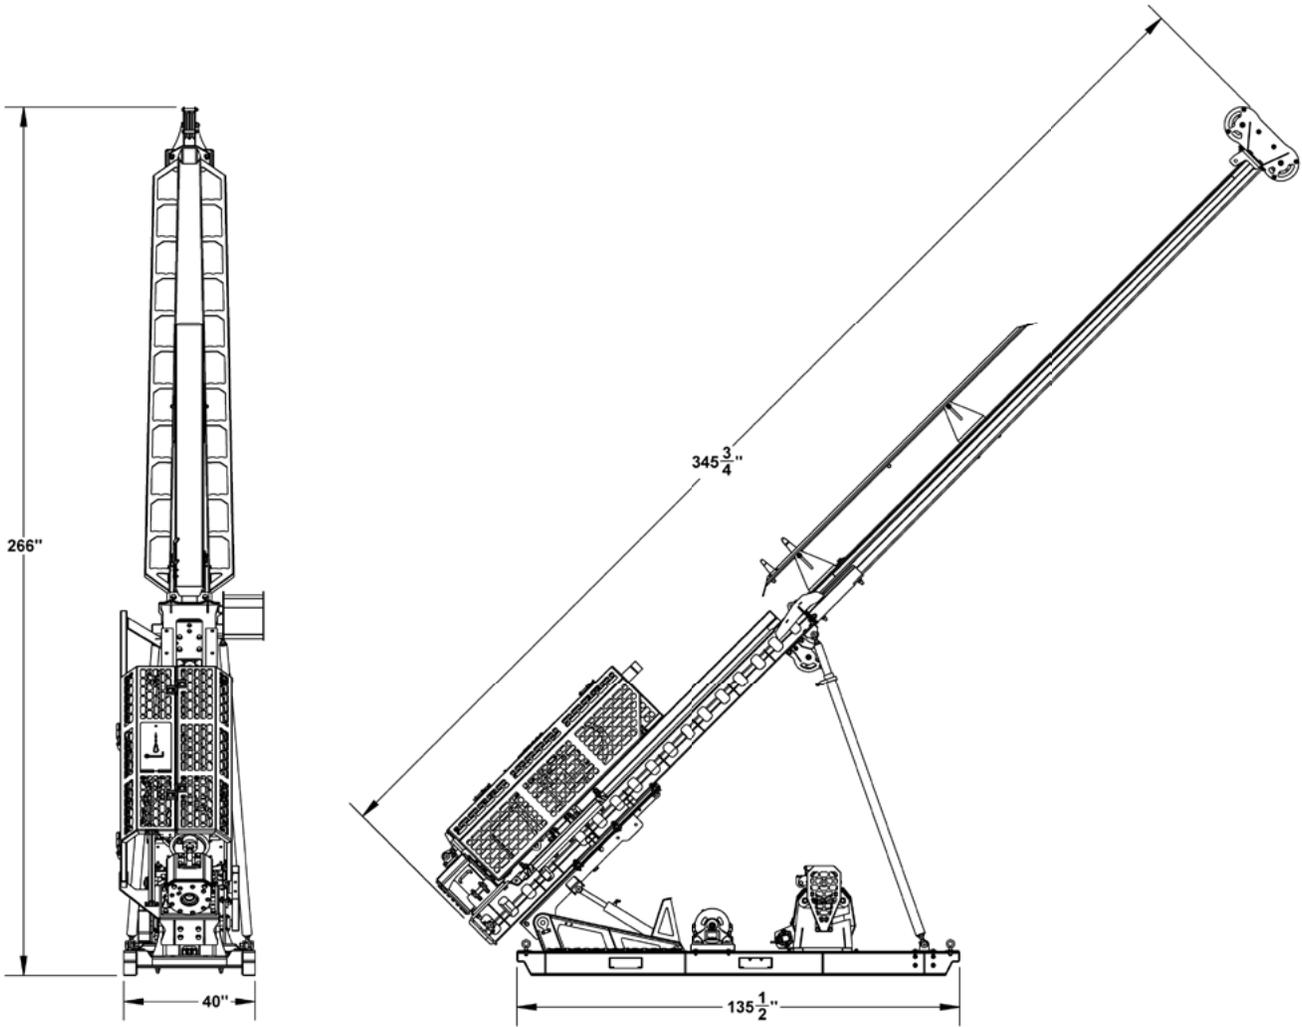





X-10 LONG STROKE DIAMOND DRILL

The X-10 Long Stroke is a versatile and robust solution designed to meet the demands of drilling applications. With its modular design powerful cylinder, and a range of features, it offers flexibility and reliability for diverse drilling projects.

KEY FEATURES:

- Both H and P head foot clamp configurations
- Heavy-duty construction, ensuring longevity and reliability in demanding applications
- Enhanced diameter featuring a double sheave for increased strength and stability
- Equipped with a telescopic tower
- Designed to be mounted on a fly shack or track platform
- Capable of handling a 20' rod pull, allowing for efficient extraction and manipulation of rods during operations

SPECIFICATIONS

STROKE LENGTH	132" Feed Stroke
FUEL CAPACITY	250L double-walled fuel tank
ENGINE	Tier 4 Cummins Turbo Diesel 180 Horsepower 4-cylinder
WEIGHT	Breaks down to 2,000lb lifts
WIRELINE ASSEMBLIES	Level wind winch 1,500m 3/16" wireline capacity Rotzler swivel rod hoist
FEED FRAME	UHMW slide saddle 48" mast dump Proprietary feed frame design internally reinforced 45 to 90 degree operational angles 50,000 lbs of pull back
HEAD & FOOT CLAMP	H heads available P foot clamps and H drill head
GUARDING	Full guarding package available for all applications Interlock switch for safe drilling operation
HYDRAULIC SYSTEM	Air-cooled hydraulics system Hydraulic pilot controls Splitter box pump drive system Rexroth and Kawasaki triple pump design Synchronized head and foot clamp with options to isolate functions

FEATURES




Dash Panel



Air Cooler



Mast Dump

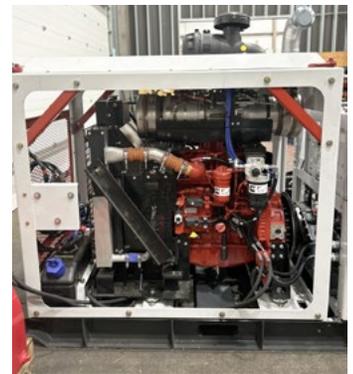




Engine

SPECIFICATIONS

WEIGHT	Designed for modular application with the ability to break down to 1800 lbs lifts
FORCE	Single feed cylinder capable of exerting over 50,000 lbs of pull back force
FEED FRAME	48" mast dump
STROKE LENGTH	Extended 132" feed stroke for increased versatility and productivity

DEPTH CAPACITY BASED ON ROD WEIGHT AT 75% SAFETY FACTOR

Rod Size	Depth Capacity in Meters	Depth Capacity in Feet
B	2829	8950
N	2181	7160
H	1479	4870
P	978	3200

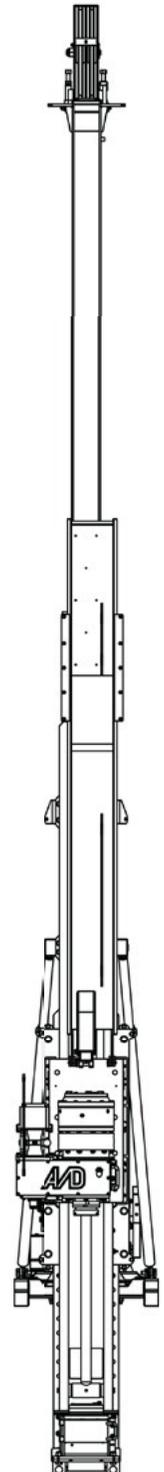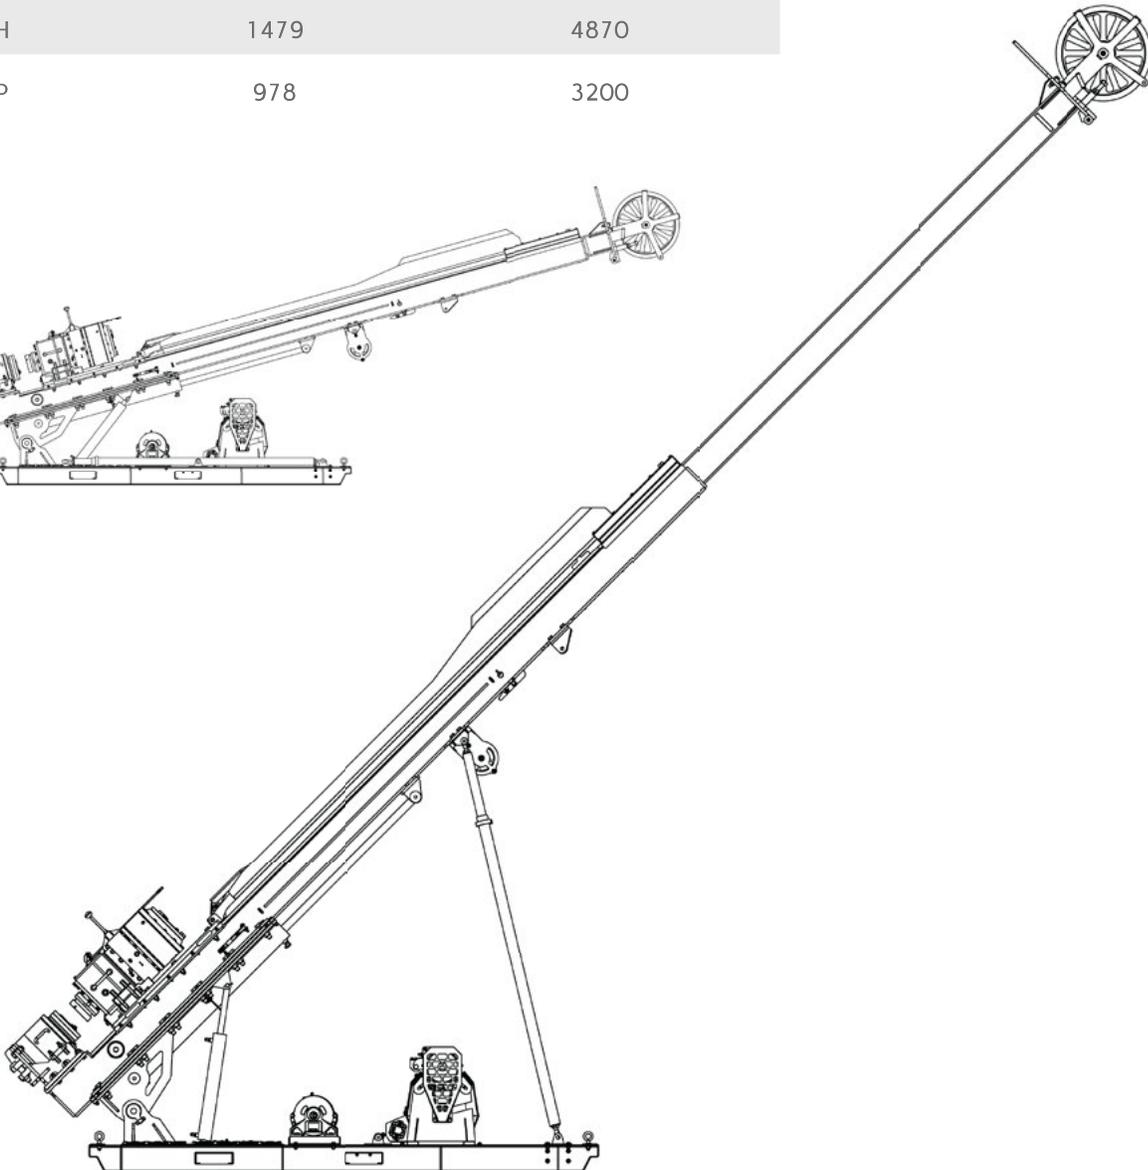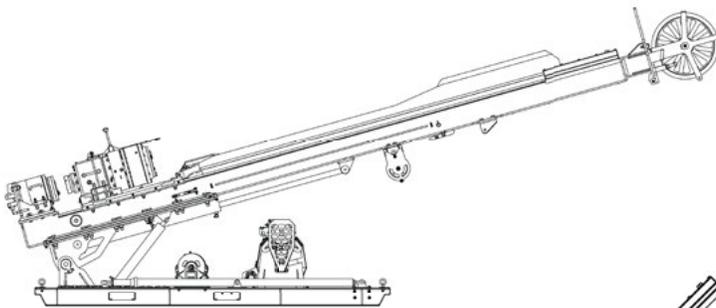





TX-PLATFORM

Our track system is powered by the drill's engine and hydraulics carrying your drill to the target with minimal support equipment, offering adaptability to each one of your exploration projects.

KEY FEATURES:

- 312 steel cat track
- Hydraulic leveling cylinders
- Remote operation
- Drop-down walkways

SPECIFICATIONS

TRACKS	CAT 312 steel track system
WEIGHT	20,000lb overall weight
DIMENSIONS	Shipping: 92" wide x 180" long x 101" tall Operational: 155" wide x 218" long x 120" tall
REMOTE CONTROL SYSTEM	12v wireless remote for electric over hydraulic function
FUEL AND MUD SYSTEM	250L double walled fuel tank 500L single mud tank systems with slide-in mixer

FEATURES



Removeable
undercarriage



312 steel cat
tracks



Leveling
cylinders



Drop down
walkways



Integrated drill mounts and
drip tray





Remote control hydraulic
operation



Integrated
fuel tank

OPTIONS

- Fold down walkway on drillers side to access engine/power pack
- Custom walkway options
- Hydraulic winch
- Integrated fuel tank

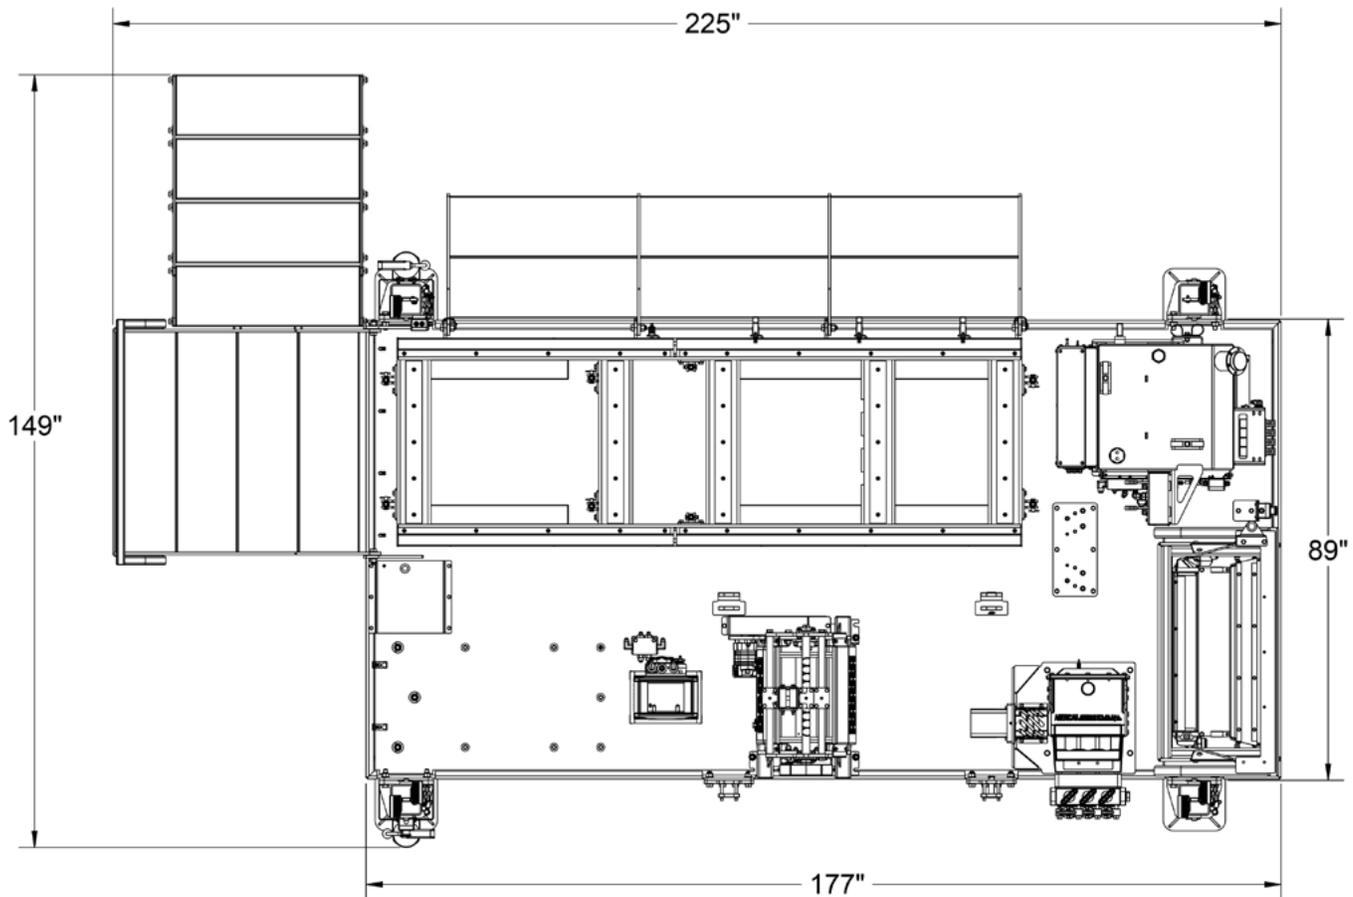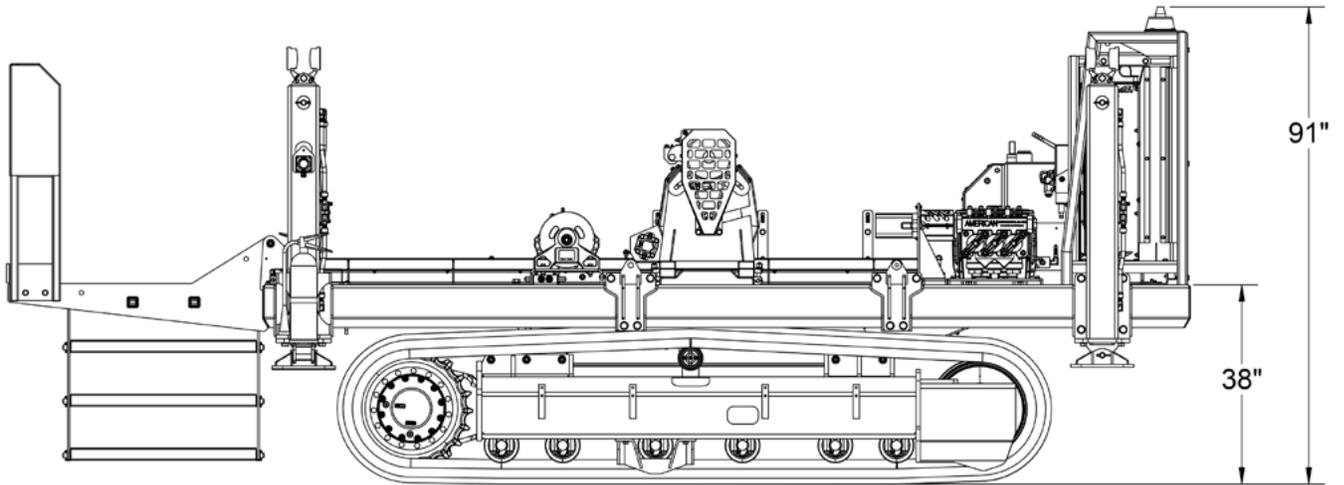



SX-PLATFORM

KEY FEATURES:

- Hydraulic slide-out for additional workspace
- Hydraulic leveling cylinders, guarded by serrated dozer teeth
- Custom lighting, fuel tank, safety railings, and pony walls
- AVD rod handler
- Hydraulic tilt rod rack

SPECIFICATIONS

GUARDING	Integrated rolling with interlock
FUEL CAPACITY	250L double-walled fuel tank
ROD CAPACITY	1,700m of NQ in 9m lengths
WEIGHT	33,000 lbs
DIMENSIONS	Shipping: 310" long x 137" wide x 138" tall Operational: 359" long x 221" wide x 151" tall
MUD SYSTEM	650L bottom tank with slide-in mixer 450L top tank with slide-in mixer 435 pump mount is integrated directly into the shack

FEATURES




Integrated drill
mounts & drip tray



Leveling cylinders
with teeth



Reinforced
skidbase

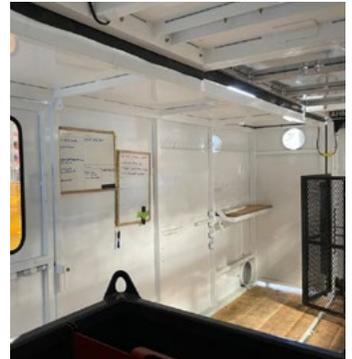

Hydraulic slide-out
for additional
workspace



Interior/exterior
full led light
package



Integrated guard
system




Ladder and guard
rails package



Rod handling and
stacking system

OPTIONS

- Wire and mount 6) LED lights with switch and GFI outlet
- Wire and mount 8) LED flood lights on exterior corners for shack
- Removable railings outside of roof with kick plate
- Ladder cage with spring hinge door for ladder access
- Levelling cylinders with counter balance
- Leveling cylinder valve bank and hoses plumbed into shack
- Hand rails for hitch extensions
- Aluminum stair set for hitch
- Integrated rolling guard system
- Rooftop lifeline for lanyard
- Hitch wings
- 3 E-stop switches
- 435 Supply pump, hydraulic motor, coupling hydraulic lines plumbed in
- 2nd mud tank with mixers dual flow control (1st mud tanks and mixer on drill quote)
- Safe sleeve hydraulic hose cover for rod handler and drill shack
- Hydraulic tilt roof panel for rod stacking area
- Three aluminum, hinging roof panels for drill opening
- Wall insulation (laser cut holes on all panels and aluminum interior panels)
- Ceiling Insulation (laser cut holes on all panels with aluminum interior panels)

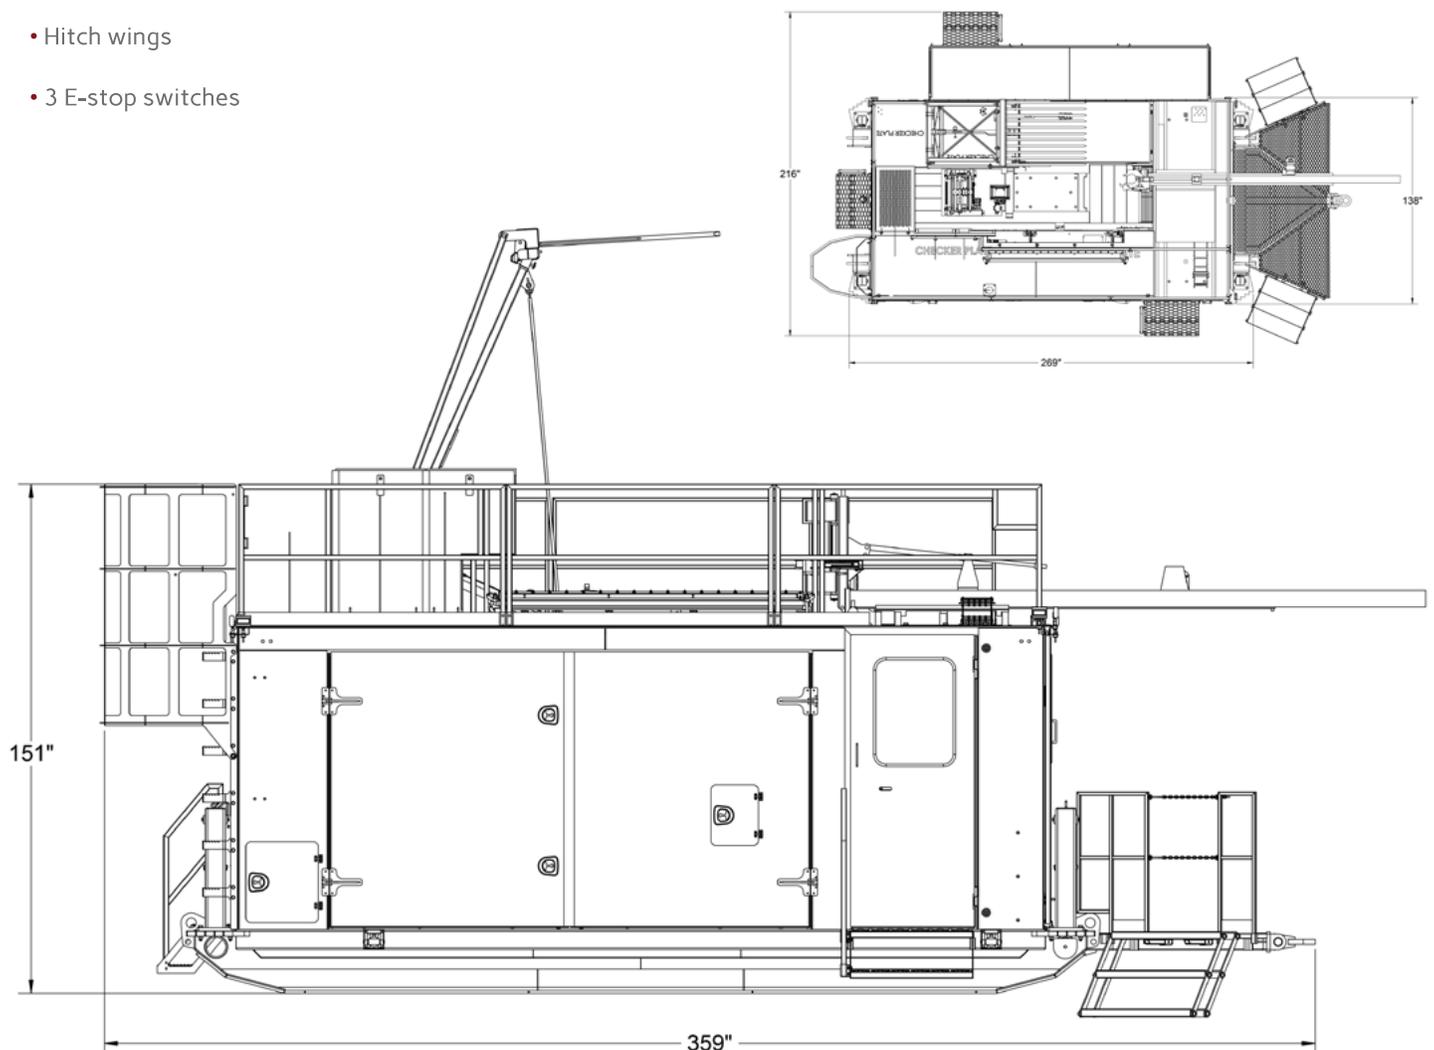



OPTION 1:
Fast Moving
Heli-Portable



OPTION 2:
Heli-Portable
Rod Handling

FX PLATFORM HELI-PORTABLE OPTIONS


The FX-Platform is available in a fast moving option and a rod handling option to meet the specific needs of each project.

OPTION 1: FAST MOVING HELI-PORTABLE

KEY FEATURES:

- **H-Frame Design:** Eliminates the need for skids, enabling swift and efficient drill moves.
- **Integrated Alignment:** Secures drill components, keeping them perfectly aligned over the collar for optimal performance.
- **Standard Fit:** 16' x 16' industry-standard drill pad.
- **Versatile Shack Options:** A variety of configurations to suit diverse operational needs.

- Drawing from extensive drilling experience, TactEx highly recommends incorporating a second "H" frame to streamline drill move times and enhance efficiency. This additional frame can be slung to the next drill pad in advance, with the preset azimuth already secured in position, ensuring a seamless transition. By reducing the need for component "set asides" and mitigating alignment delays when positioning the X-10 on the next pad, this approach significantly optimizes operational workflows and minimizes downtime.

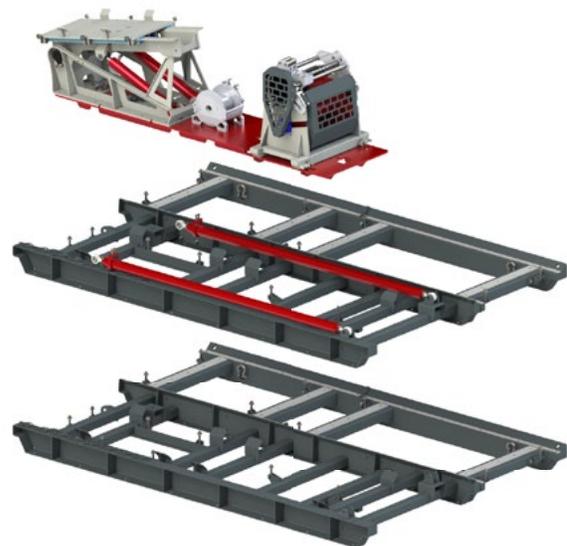

SPECIFICATIONS

WEIGHT 1,800lb max

DIMENSIONS 16x16 industry standard pad
Breaks down into small lifts for easy transportation

CONFIGURATIONS Inquire about our shack options - multiple configurations available, optimized for setups without rod handling

OPTION 2: HELI-PORTABLE ROD HANDLING

KEY FEATURES:

- **Integrated Structure:** Drill and feed frame seamlessly tied into a rod-handling structure for streamlined operations.
- **Versatility for Depth:** Designed to tackle deep holes and accommodate multiple dips with ease.
- **Certified Lifting Points:** Strategically placed to ensure safe and efficient moves.
- **Heli Plate Innovation:** Combines wireline assemblies with a mast dump feed frame for enhanced functionality and transport efficiency.



Integrated drill mounts and drip tray



Heli portable rod handling system



Strategic access points

SPECIFICATIONS


GUARDING	Standard X-10 rod string cage guarding with interlock system
ROD CAPACITY	1,600m of NQ in 9m lengths
WEIGHT	Ability to be broken down into 2,000lb lifts
DIMENSIONS	Shipping: Breaks down into small lifts for easy transportation Operational: 18' long x 16' wide x 9' tall
CONSTRUCTION	Available in steel or aluminum to suit various operational needs and preferences Seamlessly ties the drill and rod handler together for enhanced stability and alignment


Option 2
Heli-Portable
Rod Handling

Length: 216"


Width: 192"

Height: 117"

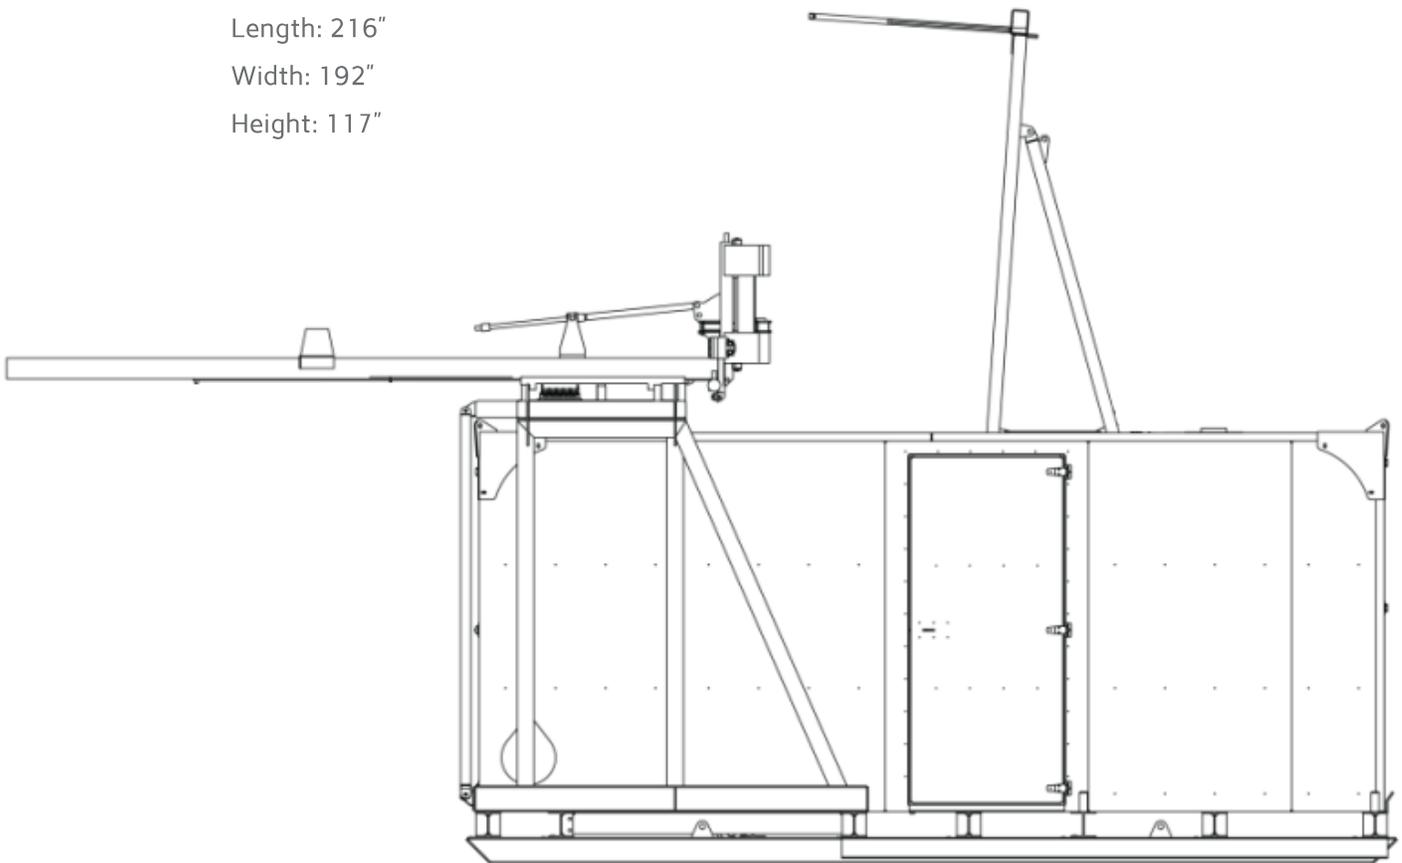

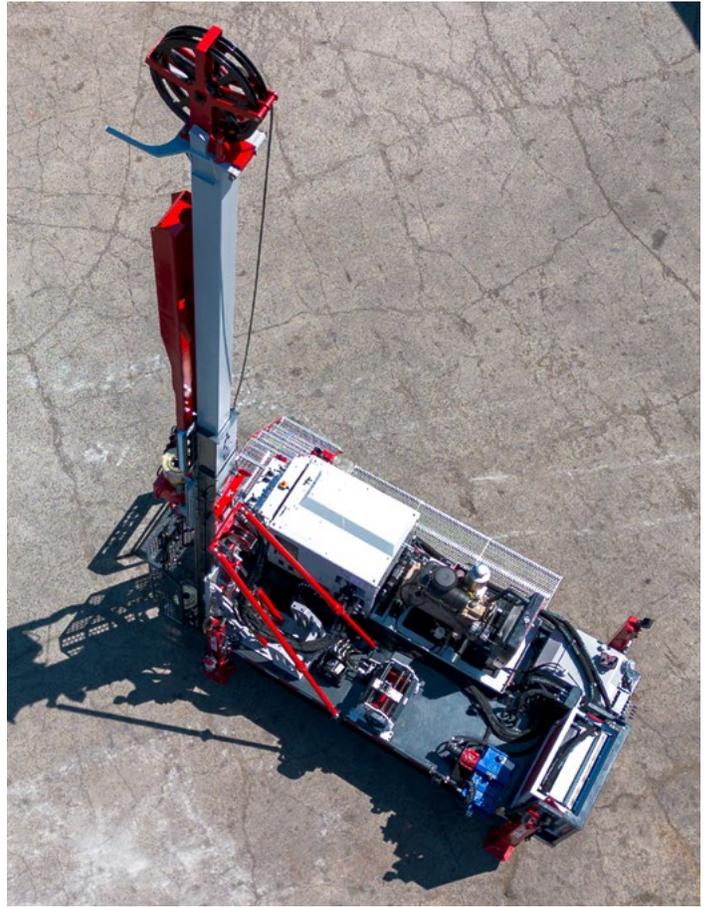

CONTACT US

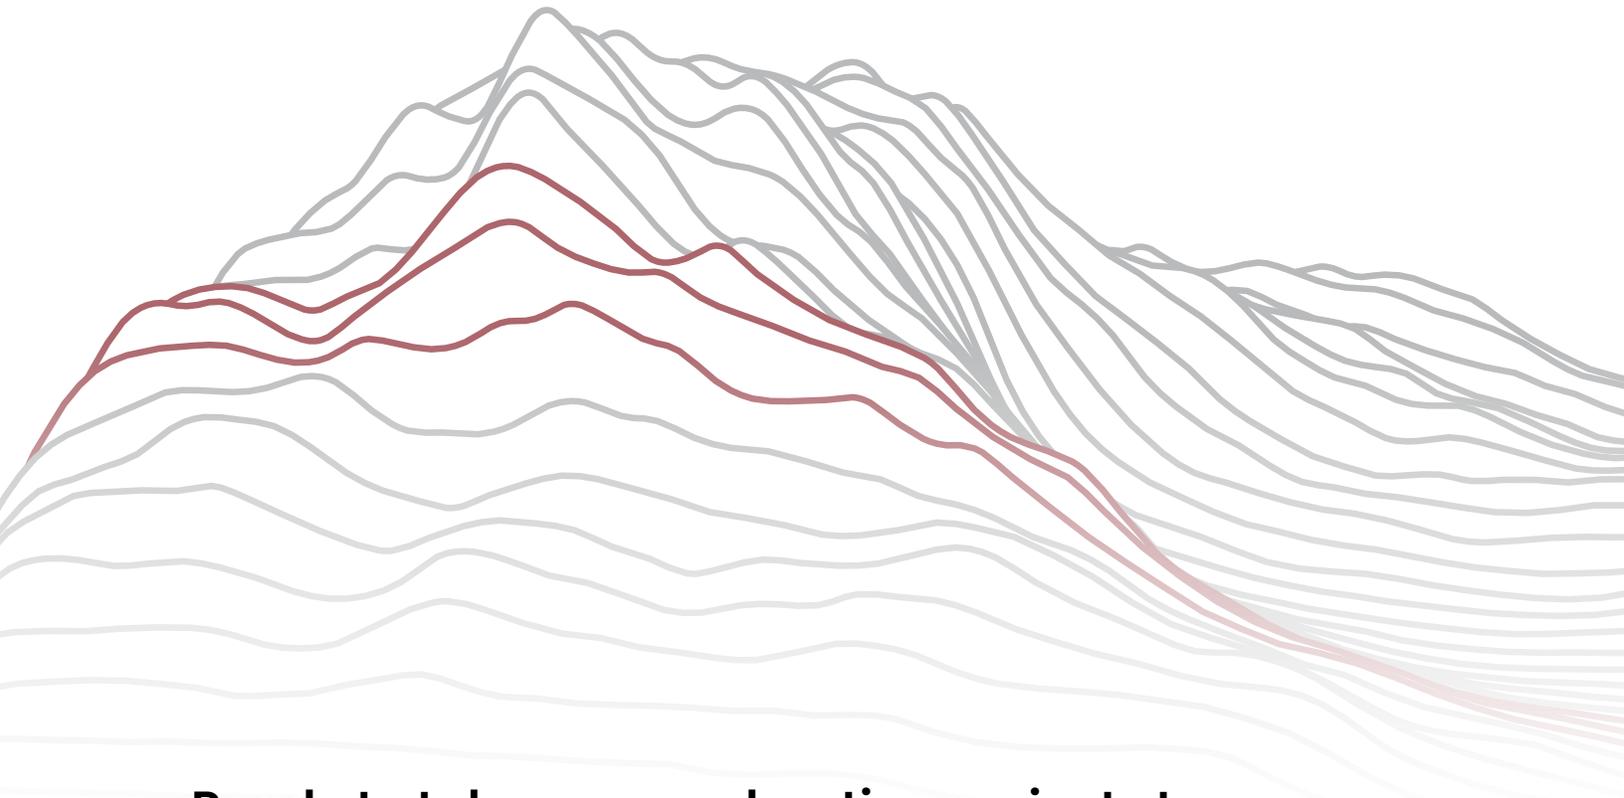

Ready to take your exploration projects to the next level?

From drill rig replacements to complete surface drill configuration support, our equipment is designed to make a difference on the job. Plus, our 24/7 support and technical service helps you feel supported every step of the way – even long after you’ve made a purchase.

Call: 250-905-0628

Email: sales@tactexindustries.com

1390 Springhill Road Parksville, B.C. V9P 2T2



TACTEX

INDUSTRIES

CONTACT US Call: 250-905-0628 Email: sales@tactexindustries.com